

Advanced All-in-One CPE

Tranzeo's **TR-SL2** series of outdoor subscriber units feature high performance radio and advanced networking and management capabilities including NAT Routing, StreamEngine™ QoS, WEP/WPA/WPA2 Security, and Bandwidth Throttling.


The all-in-one **TR-SL2-15** unit features an integrated 15dBi directional panel antenna, and comes complete with POE injector, DC adapter, and mounting hardware, yielding the lowest total cost of ownership (TCO). Also available is a connectorized unit for supporting an external antenna for more demanding applications.

The ruggedized weatherproof design meets IP67 and NEMA Type 4X environmental standards, and is ideal for conditions ranging from -60 °C to +60 °C. The **TR-SL2** series is also backed by an industry-leading **5-Year Parts and 3-Year Parts & Labour Warranty** and **Lifetime Technical Support** for worry-free network operation.



Applications

- Remote Data Acquisition
- Internet Service
- Video Transmission
- Security and Surveillance
- Private Networks
- WiFi Hot Spots

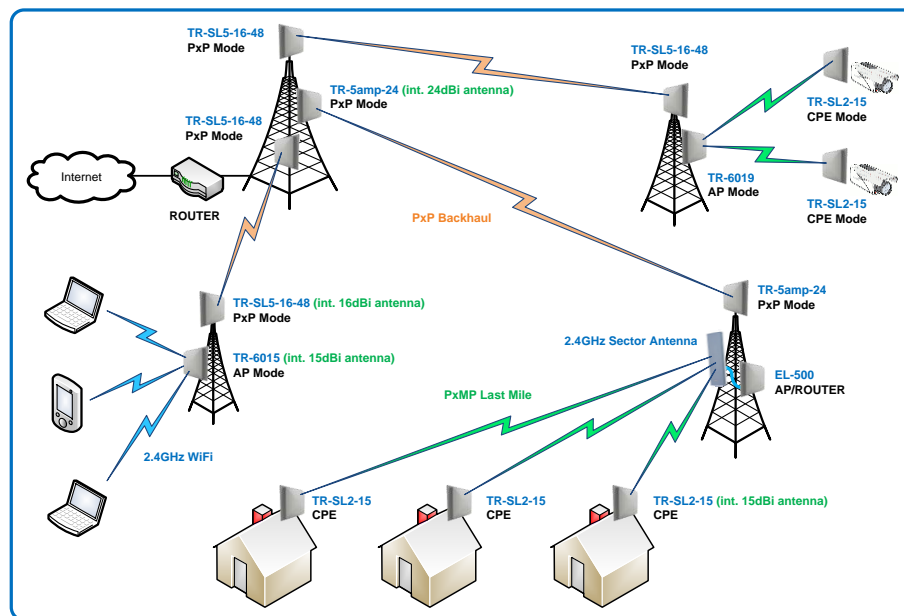

Key Features

- IEEE 802.11b/g Compliant
- Up to +23dBm Transmit Power with Adjustable Output
- Selectable 5/10/20MHz Channels
- Bandwidth Throttling
- Built-in StreamEngine™ QoS
- WEP/WPA/WPA2 Security
- TCP/IP, UDP, TFTP, SNMP v2c
- NAT, PPPoE, VPN Pass-through
- Power-over-Ethernet (PoE)
- All-in-One Design with Integrated 15dBi Panel Antenna
- Web-based Management Tools
- Remote Firmware Upgrade
- Daylight Visible Alignment LED's for Quick Deployment
- Rugged & Weatherproof Design

About Tranzeo Wireless Technologies™

Tranzeo Wireless Technologies Inc. (TSX:TZT) leads the wireless broadband industry for value, by producing high-performance wireless network equipment with a low cost of ownership and unparalleled service allowing communities and businesses to communicate without boundaries. Since the company's inception in 2000, Tranzeo's optimum cost effectiveness, premium quality and responsive support have attracted a growing number of devoted dealers and distributors worldwide.

Tranzeo Wireless Technologies Inc.

19473 Fraser Way, Pitt Meadows, BC, Canada V3Y 2V4 • T: 604.460.6002 • F: 604.460.6005 • Toll Free: 1.866.872.6936 • www.tranzeo.com

Radio Interface					
Standards	IEEE 802.11b/g ⁽¹⁾				
Frequency Range	2400 – 2483.5 MHz				
Channel Bandwidths	5MHz, 10MHz, 20MHz				
Radio Mode	Customer Premise Equipment (CPE)				
Transmit Power	+23 dBm (max) with Adjustable Output				
Receiver Sensitivity	b-mode	-85 dBm @ 11 Mbps, -90 dBm @ 1 Mbps			
	g-mode	-72 dBm @ 54 Mbps, -89 dBm @ 6 Mbps			
Data Rate & Modulation	b-mode	5.5/11 Mbps CCK, 2 Mbps DQPSK, 1 Mbps DBPSK			
	g-mode	48/54 Mbps QAM-64, 24/36 Mbps QAM-16, 12/18 Mbps QPSK, 6/9 Mbps BPSK			
Receive Signal Strength	Noise and Receive Signal Levels (dBm) and Daylight Visible Alignment LED's				
Antenna Polarization	Horizontal or Vertical				
Antenna Options and Model Information					
Model No. ⁽²⁾	Type	Wind Load (N)		Beamwidth	
		100 mph	125 mph	Horizontal	Vertical
TR-SL2-Nf/W	N-Female Connector	72	112	N/A	N/A
TR-SL2-15f/W	15 dBi Panel (internal)	72	112	30°	30°
Networking and Management					
Device Management	Cross-Platform Utility, Web-Based Management, Remote Configuration and Firmware Upgrades (via IP), TFTP, SNMP v2c (MIB-II, 802.11 MIB, Tranzeo MIB), Import/Export/Save Settings Profiles				
Protocols	TCP/IP, UDP, NAT, DHCP Client/Server, PPPoE, VPN Pass-Through, Multiple MAC Bridging				
Quality of Service (QoS)	StreamEngine™ QoS				
Bandwidth Management	Bandwidth Throttling (Bridge and Router Modes)				
Security	40/64-bit and 128-bit WEP Encryption, WPA/WPA2 (TKIP/AES), MAC address filtering				
Ethernet	1 x 10/100Base-T (Water-Tight RJ-45)				
Power Supply					
Power Consumption	4 Watts (max)				
Power Supply	Power over Ethernet (PoE)				
DC Adapter	18VDC/1.1A (INPUT: 120-240VAC~ 50-60Hz, 0.6A)				
	f-Model: Fixed UL Plug (US only) W-Model: Snap-In Plugs for US, UK, and EU included				
Mechanical and Environmental					
Radio Dimensions	10.38" x 8.63" x 3.00" (26.4cm x 21.9cm x 7.6cm)				
Radio Weight	1.75 lbs (0.8 Kg)				
Installation Hardware (included)	PoE Injector with Built-in Surge Protection, Ethernet Boot with Weatherproof Gasket, L-Bracket with KEP Nuts and U-Bolt for Pole Mount				
Environmental Rating	IP67 and NEMA Type 4X				
Operating Temperature	-65°C to +60°C				
Storage Temperature	-40°C to +85°C				
Compliance and Warranty					
Export Control	HTC 8517.69.0000, ECCN 5A002 ENC, ECL 1-5.A.2.A.1				
Compliance & Approvals	RoHS, FCC Part 15 Class B, Industry Canada, CE, EMC: EN 301 489, Safety: EN 60950, Radio: EN 302 213				
Warranty	5-Year Parts / 3-Year Parts and Labour ⁽³⁾				

⁽¹⁾ g-mode available only in products built after January 10, 2007 ⁽²⁾ f: FCC Model (for use in the USA only), W: World Model (subject to local regulatory requirements) ⁽³⁾ 1-Year Parts and Labour warranty for products built before December 1, 2006, and 3-Year Parts and Labour warranty for products built after December 1, 2006 and before December 31, 2007. Specifications are subject to change without notice. StreamEngine is a trademark of Ubicom. Tranzeo and the Tranzeo logo are registered trademarks of Tranzeo Wireless Technologies Inc.