


TR-CPE200-15

All-in-One CPE with 15dB Antenna

Includes the following features:


- Station Adapter Mode
- Power over Ethernet (PoE)
- Multiple MAC Bridge Support
- DHCP Client
- 128bit WEP
- Web Management
- 15dB Integrated Panel Antenna
- Outdoor CAT5 Connector
- *New* Higher 23dB (200mW) Output
- *New* Higher Receive Sensitivity (-89dB @ 11Mbps)
- *Improved* Transient Discharge Protection (Tested to 2200volts)
- *New* Grounding Post for easier grounding
- *New* HTML Interface
- *New* High Output LEDs
- *New* Remote Management & Remote Update Capability
- *New* Signal and Noise levels in dBm
- *New* Adjustable RTS/CTS settings

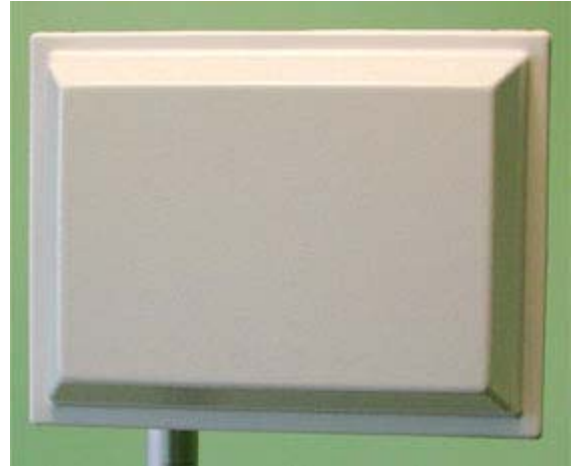

TR-CPE200-19

All-in-One CPE with 19dB Antenna

Includes all the features of the TR-CPE200-15 along with a high powered 19dB integrated Antenna.

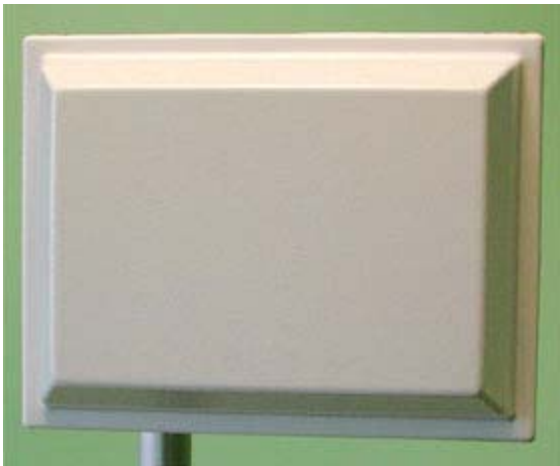

Specifications

TR-CPE200-15 TR-CPE200-19

Standards:	802.11b	802.11b
Frequency Range	2400MHz to 2483.5MHz	2400MHz to 2483.5MHz
FCC ID:	QRF-TRCPE200-15	QRF-TRCPE200-19
Radio Mode:	Station Adapter Infrastructure	Station Adapter Infrastructure
Data Range & Modulation:	11Mbps & 5.5 Mbps CCK, 2 Mbps DQPSK, 1 Mbps DBPSK	11Mbps & 5.5 Mbps CCK, 2 Mbps DQPSK, 1 Mbps DBPSK
Communication Method:	Half-Duplex	Half-Duplex
Transmit Power:	+36dBm EIRP	+42dBm EIRP
Receiver Sensitivity:	-89dBm @ 11Mbps	-89dBm @ 11 Mbps
Antenna:	15dB Panel	19dB Panel
Horizontal Beamwidth:	20 Degrees	15 Degrees
Vertical Beamwidth:	33 Degrees	16 Degrees
Polarization:	Horizontal. or Vertical	Horizontal. or Vertical
Remote Config	Based on IP Address	Based on IP Address
Device Management	Web-Based Management	Web-Based Management
Protocol Supported	TCP/IP, IPX, NetBEUI	TCP/IP, IPX, NetBEUI
Security:	40bits and 128 bits WEP encryption	40bits and 128 bits WEP encryption
Ethernet Connector:	10 base T (Water Tight RJ-45)	10 base T (Water Tight RJ-45)
Power Supply (PoE):	DC 12V	DC 12V
Operating Temperature:	-55 Deg C to +70 Deg C	-55 Deg C to +70 Deg C
Dimensions:	13" x 10"	14" x 16"
Warranty:	1 Year Depot	1 Year Depot